


# Pressure regulator, Series NL2-RGS

- G 1/4
- Qn = 2000 l/min
- Standard pressure regulator
- Activation Mechanical
- with pressure gauge in hand wheel
- suitable for ATEX

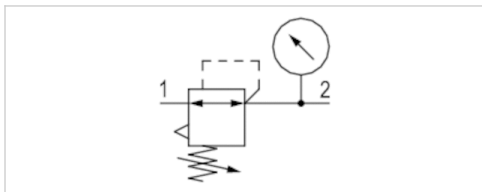

Parts	Pressure regulator
Mounting orientation	Any
Certificates	suitable for ATEX
Working pressure min./max.	0,5 ... 16 bar
Ambient temperature min./max.	-10 ... 60 °C
Medium temperature min./max.	-10 ... 60 °C
Medium	Compressed air Neutral gases
Regulator type	Diaphragm-type pressure regulator Can be assembled into blocks with relieving air exhaust
Regulator function	See table below
Adjustment range min./max.	single
Pressure supply	Mechanical
Activation	0,4 kg
Weight	

## Technical data

Part No.		Port	Flow	Adjustment range min./max.
			Qn	
0821302557		G 1/4	2000 l/min	0,1 ... 3 bar
0821302559		G 1/4	2000 l/min	0,2 ... 6 bar
0821302558		G 1/4	2000 l/min	0,5 ... 10 bar

Part No.	Pressure gauge
0821302557	with pressure gauge in hand wheel
0821302559	with pressure gauge in hand wheel
0821302558	with pressure gauge in hand wheel

Nominal flow Qn with secondary pressure p2 = 6 bar at Δp = 1 bar, Panel nut included in scope of delivery

Suitable for use in Ex zones 1, 2, 21, 22.

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Suitable for use in Ex zones 1, 2, 21, 22.

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.

Relieving exhaust ( $\leq 0.3$  bar over set pressure).

With rear exhaust ( $> 3$  bar ).


Recommended pre-filtering 5  $\mu\text{m}$

## Technical information

Material	
Housing	Die cast zinc
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber

## Dimensions

### Dimensions

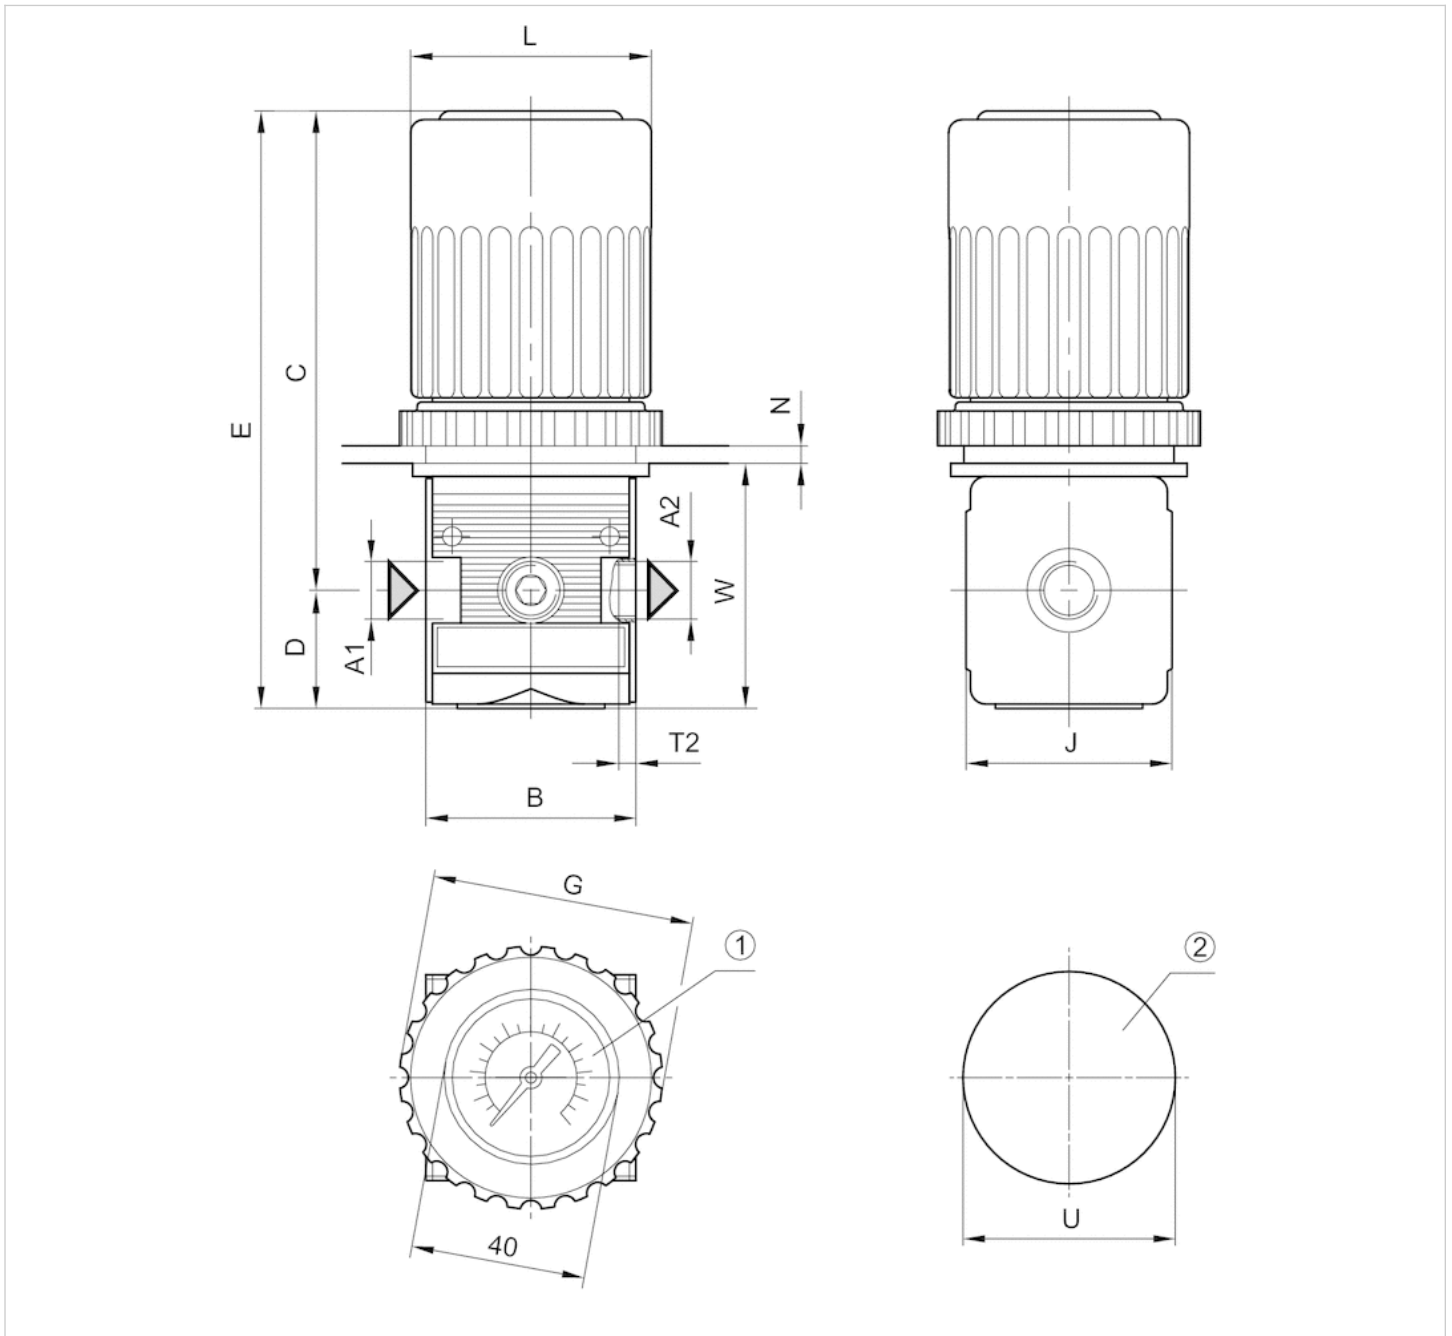


- A1 = input
- A2 = output
- 1) pressure gauge  $\varnothing$  40
- 2) opening for control panel assembly

### Dimensions in mm

A1	A2	B	C	D	E	G	J	L	N	T2	U	W
G 1/4	G 1/4	48	107	27	133	60	47	54	4	9.5	48.5	55


# Diagrams

## Pressure characteristics curve

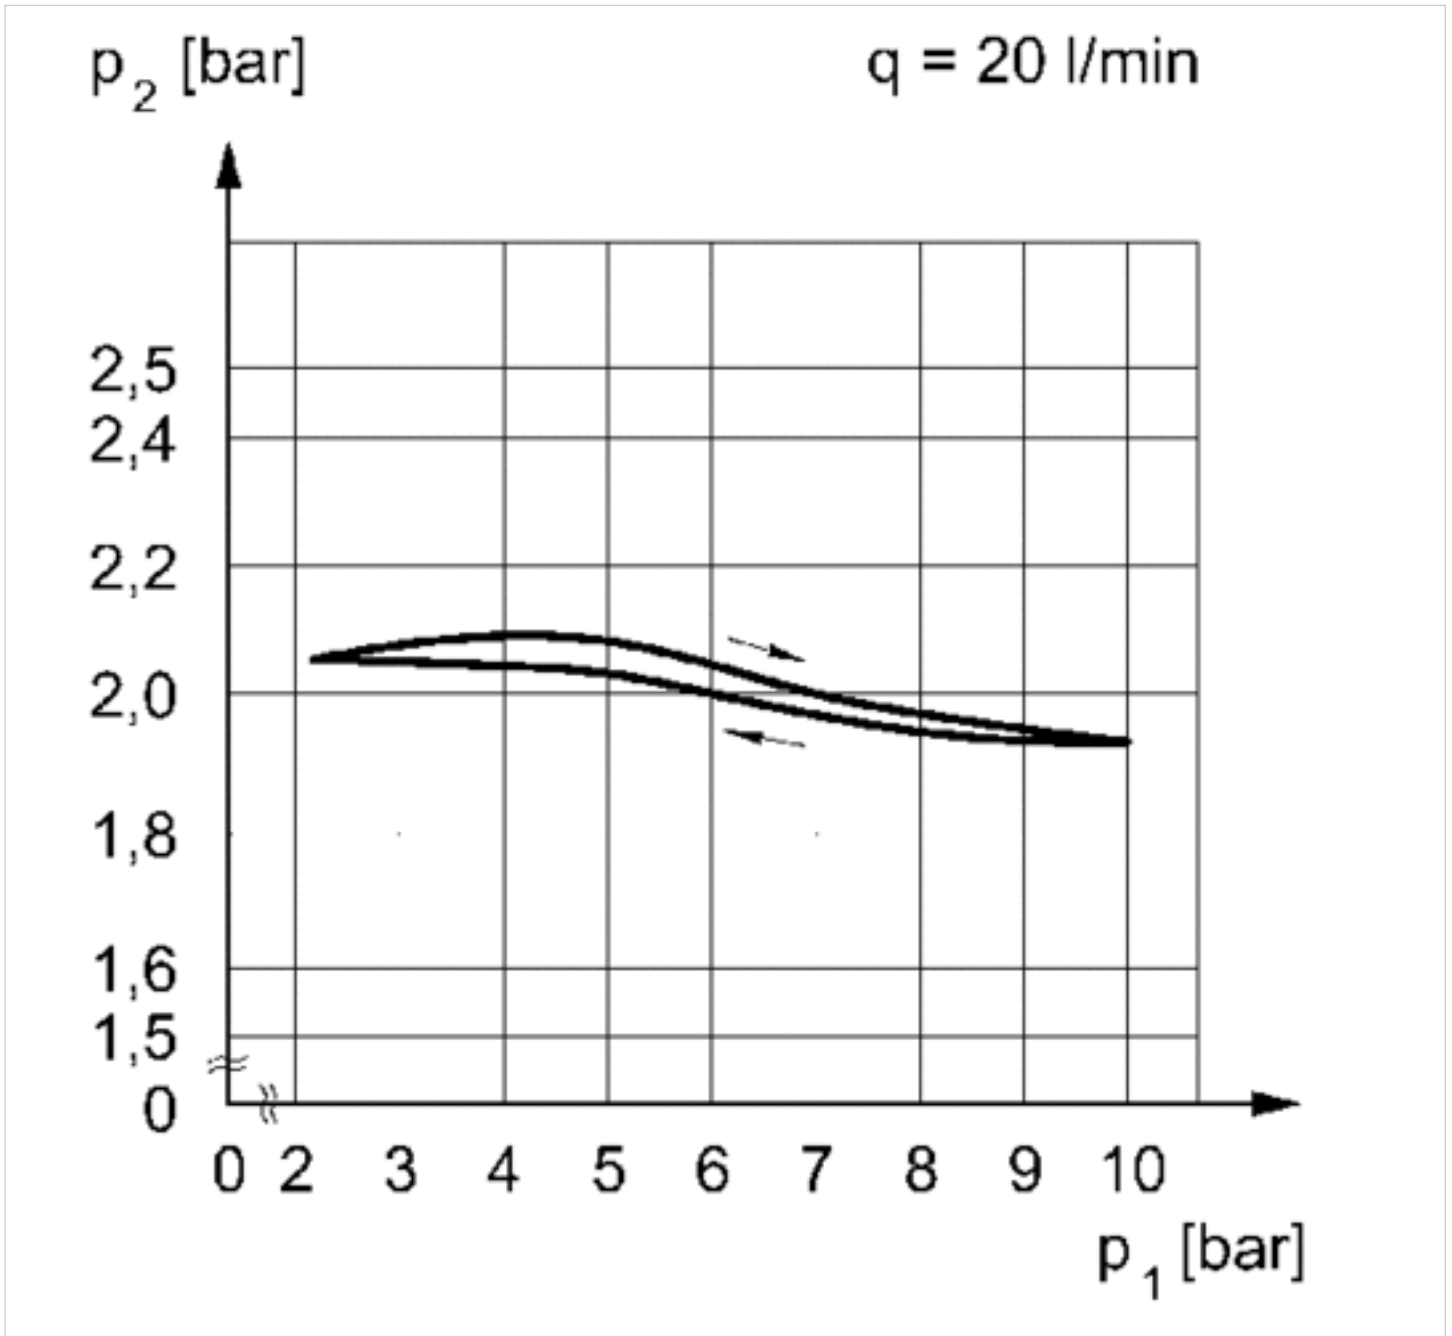


$p_1$  = working pressure  
 $p_2$  = secondary pressure  
 $q$  = flow rate

Flow rate characteristic (setting range p2: 0.5 - 10 bar)

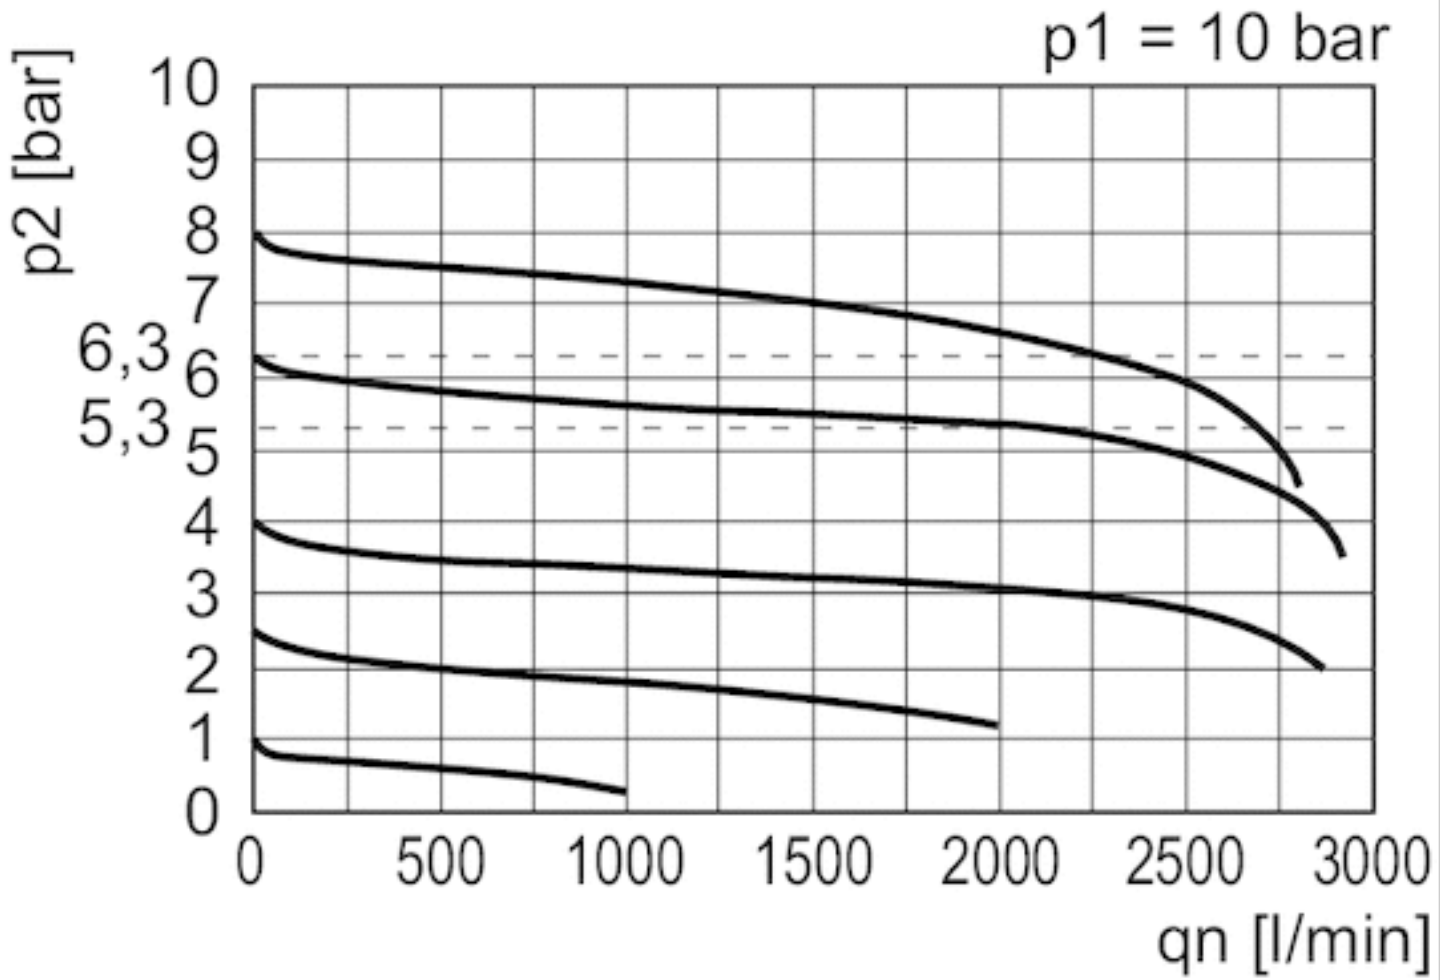

$p_1$  = Working pressure  
 $p_2$  = Secondary pressure  
 $q_n$  = Nominal flow

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management

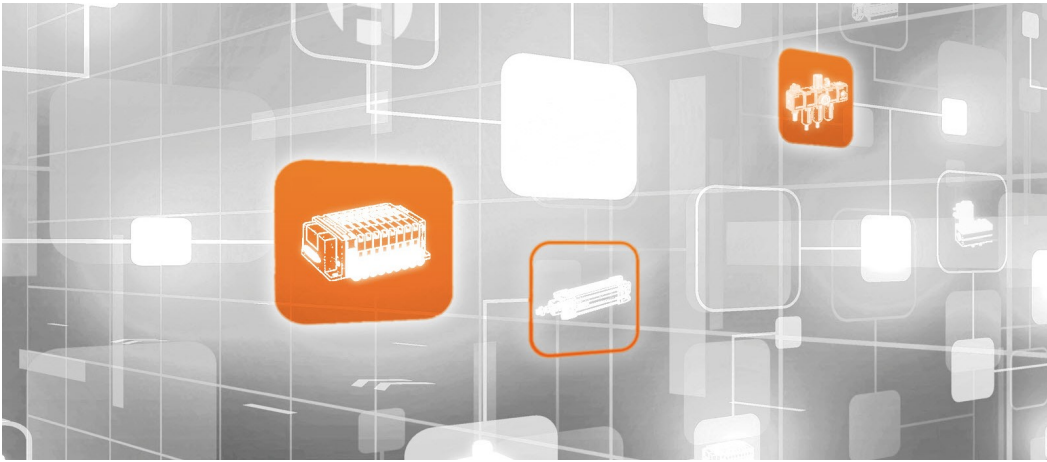

Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



**CONSIDER IT SOLVED™**