


## M4500 Indicator Panel

- Simplifies and comprises indication in control panels and switchboards
- Complete unit for flush mounting in standard instrument size 72 x 72mm
- Supplied with 6 indication channels
- LED colour change through plug-in system
- The blank legend card can be typed or printed to suit
- Quick installation by means of clamping fittings and a plug-in terminal block for easy service
- Two integrated push buttons, one for lamp test and one for external use




#### **Function**


A connection from REF (Terminal 7) to the terminal with similar number as the indicator channel, will illuminate the LED of the appropriate channel.

## **Typing**

A text description for the LEDs can be printed on the blank legend card situated between the two covers at the front. The card can be taped onto a sheet of paper to enable printing. SELCO provides a Word template for doing this in an easy manner.

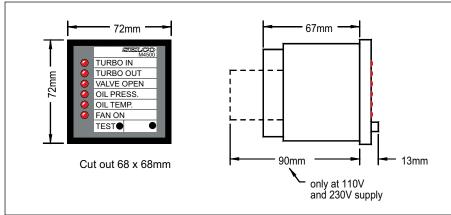

Connection Diagram.



Dimensions.



# Specifications

## M4500 Indicator Panel

## **SELCO Worldwide**



Voltage supply	24V DC ±25%	
Inputs	6 inputs	
Extra push button	250V AC, 0.5A	
Operating temperature	-10°C to +70°C	
EMC	CE according to EN50081-1, EN50082-1, EN50081-2, EN50082-2	
Burn-in	50 hours before final test	
Weight	M4500 0.2kg, M4500 230V AC supply 0.3kg	
Dimensions	72 x 72 x 67mm (H x W x D)	
Panel cut out	68 x 68mm	

**Protection degree at front** IP31

The specifications are subject to change without notice.

## **Type Selection Table**

Туре	Supply	Input
M4500.0010	24V DC/AC	+24V DC
M4500.0020	48V DC/AC	+48V DC
M4500.0030	12V DC/AC	+12V DC
M4500.0040	24V DC/AC	0V DC (inverted reference)
M4500.0050	48V DC/AC	0V DC (inverted reference)
M4500.0060	12V DC/AC	0V DC (inverted reference)

## **Accessories**

M0845.0010 Front cover for M4500 with handle	IP54
M0845.0020 Front cover for M4500 with key	IP54

Main office: Betonvej 10 DK-4000 Roskilde Denmark

Phone: + 45 7026 1122 Fax: + 45 7026 2522 e-mail: selco.dk@selco.com

www.selco.com